



# HYDRAULIC JACKS



## DK20



Capacity: 2,0 t  
Max. height: 495 mm

### Jack for passenger cars and vans

- Very low minimum height of only 80 mm
- Wide and robust frame made of high-strength steel
- Precise and safe control whilst lowering
- Manual dead man's release for optimum safety when lowering
- Built-in safety overload valve
- Noiseless wheels incorporating a polyurethane central O ring offers maximum surface protection
- Ergonomically designed handle ensuring positive and safe operation



## DK13HLQ




Capacity: 1,3 t  
Max. height: 735 mm

### High lifter with long reach, ideal for cars with low clearance

- Very low minimum height of only 80 mm
- Wide and robust frame made of high-strength steel
- Fitted with quick-lift pedal for easy reach of lifting point
- Precise and safe control whilst lowering
- Manual dead man's release for optimum safety when lowering
- Built-in safety overload valve
- Noiseless wheels incorporating a polyurethane central O ring offers maximum surface protection
- Ergonomically designed handle ensuring positive and safe operation



	DK20	DK20Q	DK13HLQ
Capacity	2,0 t	2,0 t	1,3 t
Min. height	80 mm	80 mm	80 mm
Max. height	495 mm	495 mm	735 mm
Frame length	660 mm	660 mm	940 mm
Handle length	950 mm	950 mm	950 mm
Frame height	160 mm	160 mm	160 mm
Width	410 mm	410 mm	480 mm
Weight	31 kg	31 kg	39 kg

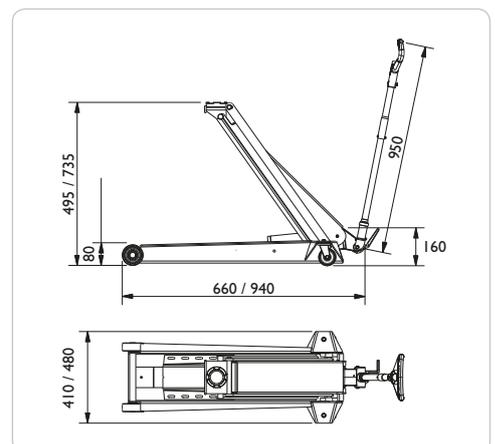

## TYRE CARE LTD

Killeshandra, Co. Cavan, Ireland • Tel. +353 49 433 4486  
sales@tyrecare.ie • www.tyrecare.ie